



"TO COOK NICELY!"

Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 Massachusetts, New Jersey, Ohio, Texas, Washington

Electric Steam Tables

Standard Features

- Fully insulated wells—all four sides and bottom of wells are insulated by fiberglass, 8" deep, dry heating style
- Temperature control—individual infinite switch controls each well
- Two type heat elements—500 watt per well and 750 watt per well
- Stainless steel die-stamped opening—12"x20", rising lip around well can keep well clean, and food pan to be easy to load and unload
- Poly cutting board-7" wide x 1/2" thick with 18 gauge stainless steel support shelf and brackets
- 18 gauge stainless steel top, body and under shelf
- Stainless steel tubular legs with adjustable stainless steel feet, getting table strong structure
- Indicator light of each well shows both power on and element heating
- Mechanical guards on all switches for safety and reliability
- Although intended for dry use, these steam table can be used wet with a compatible spillage pan(sold separately)

MODELS:

CSTEА-2B/CSTEА-3B/CSTEА-4B/CSTЕB-5B


CSTEА-2B



CSTEА-3B






CSTEА-4B

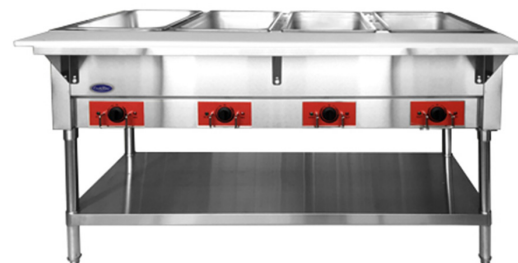

CSTЕB-5B



1 YR WARRANTY ON ALL PARTS AND LABOR (US ONLY)



Conforms to ANSI
 STD 233.116-2009 (2011)
 Certified to CSA
 STD 1.8b-2009 (2011)
 Conforms to NSF/ANSI STD.4



ATOSA USA



"TO COOK NICELY!"
 Toll Free: 855-855-0399 Email: info@atosausa.com
www.atosa.com | www.atosausa.com
 California, Colorado, Florida, Georgia, Illinois,
 Massachusetts, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Volts	Wells	Watts/well	Total watts	PH	Top Opening	Cube ft. Crated	Plug	Dimensions (inch)	Net Weight (lbs)	Gross Weight (lbs)
CSTEА-2B	110V	2	500	1000	1	2	10.95	NEMA-5-15P	30x29 ^{1/2} x33 ^{1/2}	63.9	77
CSTEА-3B	110V	3	500	1500	1	3	15.54	NEMA-5-15P	44 ^{1/8} x29 ^{1/2} x33 ^{1/2}	83.7	103.6
CSTEА-4B	110V	4	500	2000	1	4	19.78	NEMA-5-30P	58x29 ^{1/2} x33 ^{1/2}	98	131
CSTЕB-5B	240V	5	750	3750	1	5	29.66	NEMA-6-20P	72 ^{1/2} x29 ^{1/2} x33 ^{1/2}	122.5	168

PLAN VIEW

