Project #:			
tem #:			

Model RCS10TS shown

## **Medium Volume** This category of microwave is ideal for...

#### **Applications:**

- Pizza restaurants
- Casual dining
- Clubs
- Deli

#### Defrost:

- Defrosts most frozen food products



# **Medium Volume**

# Amana Commercial Microwave Model RCS10TS

#### **Power Output**

- 1000 watts of power.
- Five power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.

#### Easy to Use

- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option for easy one-touch cooking.
- Multiple quantity pad calculates the proper cooking times for multiple portions.
- User friendly touch controls are easy to use.
- Time entry option for added flexibility.
- Digital display with countdown timer for simple operation and "at-a-glance" monitoring.
- Braille touch pads are ADA compliant.
- See-through door and lighted interior for monitoring without opening the door.
- 1.2 cubic ft. (.034m³) capacity accommodates a 14" (356 mm) platter, prepackaged foods and single servings.
- Stackable to save valuable counter space.

### Easy to Maintain


- Stainless steel exterior and interior for easy cleaning and a professional look.
- Non-removable air filter protects oven components.
- Constructed to withstand the foodservice environment.
- Limited 3 year warranty.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- UL and ETL Listed.







# Amana Commercial Microwave Model RCS10TS | Medium Volume

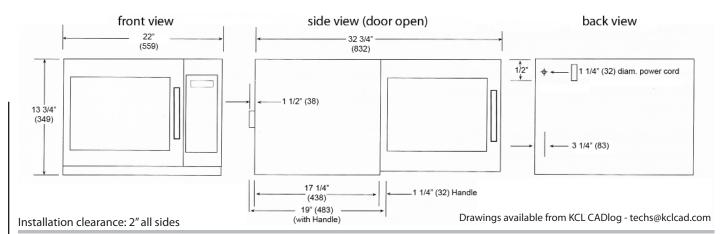

Specifications				
Model	RCS10TS	UPC Code 7280	028020724	
Configuration	Countertop			
Control System	Touch			
Programmable Control	10			
Settings Programmable	100			
Max. Cooking Time	60:00			
Power Levels	5			
Defrost	Yes			
Time Entry Option	Yes			
Microwave Distribution	Rotating antenna, top			
Magnetron(s)	1			
Display	LED			
Stackable	Yes			
Stage Cooking	Yes, 4			
Interior Light	Yes			
Door Handle	Grab & Go			
Signal	End of cycle, adjustable			
Air Filter	Non-removable with cleaning reminder			
Multiple Portion Setting	Yes, X2			
Exterior Dimensions	H 13¾" (349.25)		D*19" (482.6)	
Cavity Dimensions	H 8½" (216)	W 14½" (368.3)	D 15" (381)	
Door Depth	34" (864 mm), 90°+ door open			
Usable Cavity Space	1.2 cubic ft. (.034 m³)			
Exterior Finish	Stainless steel			
Interior Finish	Stainless steel			
Power Consumption	1550 W, 13 A			
Power Output**	1000 W** Microwave			
Power Source	120V, 60 Hz, 15 A single phase			
Plug Configuration / Cord	NEMA 5-15	5 ft. (1.5m)		
Frequency	2450 MHz			
Product Weight	41 lbs. (18.6 kg.)	11 lbs. (18.6 kg.)		
Ship weight (approx.)	48 lbs. (21.8 kg.)			
UPS Shippable	Yes			
Shipping Carton Size	H 17 ¼" (432)	W 25 ½" (660)	D 20 ½" (508)	

#### Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items with two multiple portions. Touch pad shall include Braille for ADA compliance. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 5 power levels, including defrost and 4 cooking stages. Microwave output shall be 1000 watts distributed by one magnetron with a rotating top antenna to provide superior even heating throughout the cavity. Durable door shall have a tempered glass window and a grab and go handle with a 90°+ opening for easy access. An interior light shall facilitate monitoring without opening the door. The large 1.2 cubic ft. (.034 m<sup>3</sup>) cavity shall accommodate a 14" (356 mm) platter. Interior ceramic shelf shall be sealed and recessed on oven bottom to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Front air filter shall be permanently affixed to the front of the oven and have a clean filter reminder. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, UL for safety and ETL for sanitation.



#### Warranty

Limited 3 year warranty:


Year 1 - parts, labor, and travel are covered.

Years 2 - 3 - magnetron tube (part only) is covered.

## Service

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.





225 49th Ave. Dr. SW Cedar Rapids, IA 52404 U.S.A.

- \* Includes handle
- \*\* IEC 705 Tested



800-233-2366

319-368-8120

Fax: 319-368-8198

www.acpsolutions.com