



Model: **DX-129** Item #: \_\_\_\_\_ Date: \_\_\_\_\_

Project: \_\_\_\_\_ Qty: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Pre-Rinse Spray Head with Dual Spray Technology

**DIAMOND**  
series



### DESCRIPTION

1.15 GPM Dual Spray Head Valve with Built-In Knife and Cyclone Settings, Integral Smooth-Spin Swivel

### STANDARD FEATURES


- Variable spray pattern, rotate spray head 180° for different spray style
- Knife pattern, condensed spray
- Cyclone pattern, shower spray
- 360° smooth-swivel functionality
- Ergonomic handle
- Lifetime warranty

### SPECIFICATIONS

Temp. Range	40°F - 180°F
Pressure	20-120 PSI
Flow Rate (Knife)	1.15 GPM
Flow Rate (Cyclone)	1.15 GPM
Weight	1 lbs.

### PRODUCT COMPLIANCE

- ASME A112.18.1/CSA B125.1
- NSF-61
- NSF/ANSI 372

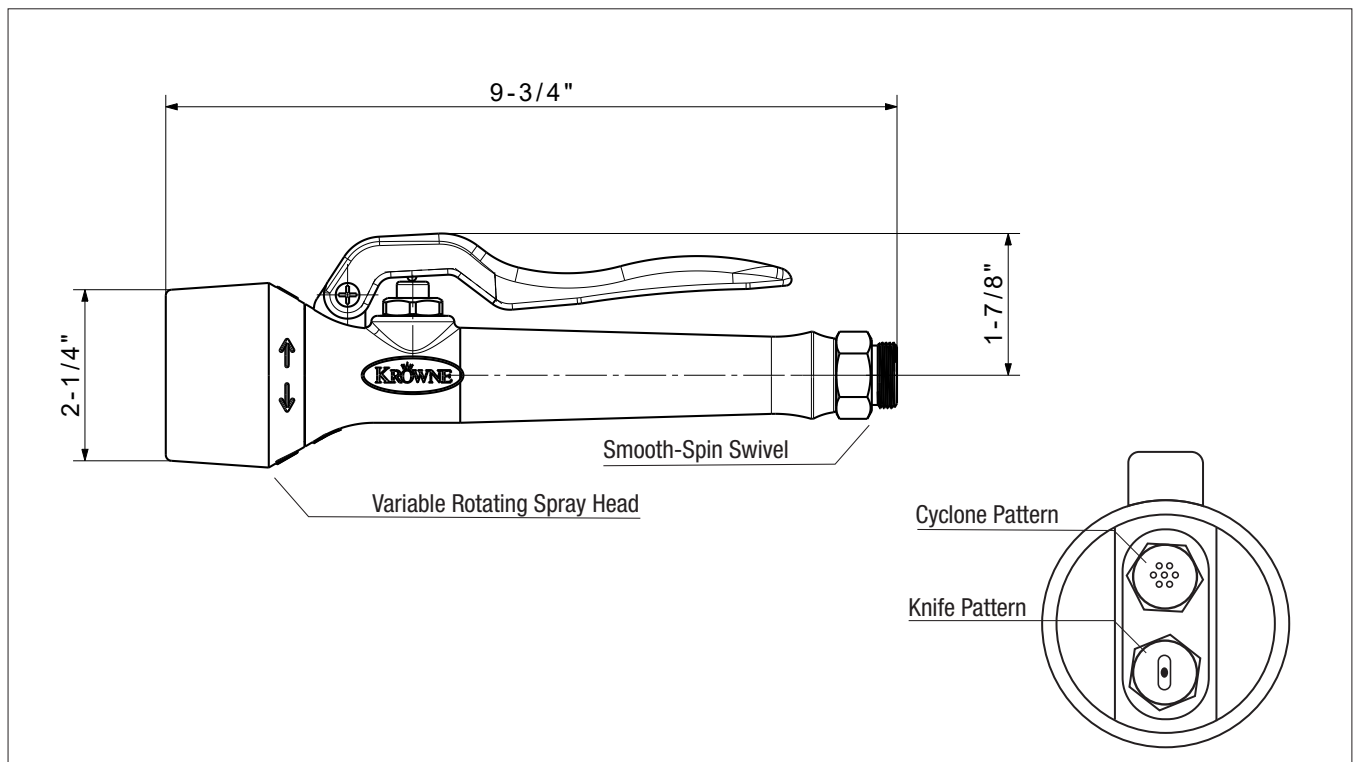

**WARNING:** Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.  
 California Proposition 65 Warning

Krowne Metal Corporation • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • [customerservice@krowne.com](mailto:customerservice@krowne.com) • [krowne.com](http://krowne.com)

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Rev. 01/2021 • No. DX-129