



Project:

Item Number:

Quantity:

INDUCTION RANGE: MIRAGE® CADET COUNTERTOP

*Mirage® Cadet 59300 Countertop
Induction Range*

DESCRIPTION

The portable countertop induction range is designed for use in light duty front-of-the-house cooking. Models 59300 and 59310 will plug into standard, dedicated 15A outlets which are readily available in most restaurants and kitchens.

The induction range comes complete with a 6-ft. (183 cm) power cord and plug. The top case frame is made from heavy-duty, 18-gauge stainless steel with a ceramic top. The ceramic top is easily cleaned with a mild cleaner. The bottom case assembly is durable molded plastic.

The induction ranges are equipped with a variety of safety features including:

- ☐ Over-heat protection
- ☐ Small-article detection
- ☐ Pan auto-detection function
- ☐ Empty-pan shut-off
- ☐ Safety auto-shut-off function

Agency Listings — 59300

This device complies
with Part 18 FCC Rules.

Agency Listings — 59310

This device complies
with Part 18 FCC Rules.

Due to continued product improvement, please consult
www.vollrathco.com for current product specifications.

MODELS

59300 1.8kW @ 120V (US only)

59310 1.4kW @ 120V (Canada only)

FEATURES

- ☐ G1 engine with 1 IGBT switch for temperature control
- ☐ Full one-year parts and labor warranty
- ☐ 20 power levels with optimum power output to a wide variety of induction-ready cookware
- ☐ 1-20 power levels or °F/°C temperature level controls
- ☐ Easy to read digital readout for power level
- ☐ 1-180 minute timer
- ☐ 75% efficiency rating
- ☐ Pushbutton controls
- ☐ Stainless steel case and top. Molded plastic bottom
- ☐ Unit comes with cord and plug and does not require hard wiring
- ☐ Ranges display HOT when unit is turned off, if the cooking surface is still hot
- ☐ FCC listed

IMPORTANT

- ☐ This appliance is intended for use with induction-ready cookware.
- ☐ All models require unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- ☐ Countertop models require a minimum clearance of 4 inches (10.2 cm) at the rear and 1 inch (2.5 cm) at the bottom.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals

Date



Setting
the **Standard**™

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Total Restaurant Supply



Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

INDUCTION RANGE: MIRAGE® CADET COUNTERTOP

MODELS	59300	1.8kW @ 120V (US only)
	59310	1.4 kW @ 120V (Canada only)

DIMENSIONS


- ❑ Shipping container dimension: 16" x 19¼" x 6½" (40.6 cm x 49 cm x 16.5 cm)
- ❑ Weight of unit: 10 lbs. (4.5 kg)
- ❑ Shipping weight: 12.2 lbs (5.5 kg)
- ❑ Dimensions shown in inches (cm)

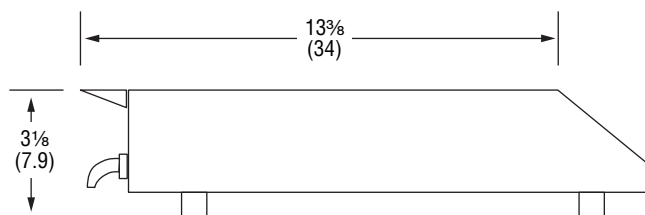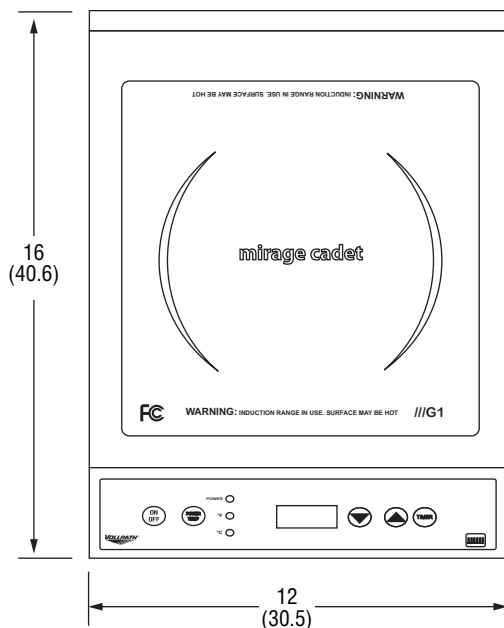

ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ

Model	kW Rating	Volts	Nominal Amps	NEMA Plug
59300	1.8 kW	120V AC	15	5-15P
59310	1.4 kW	120V AC	12	5-15P

Receptacle



www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

©2012 The Vollrath Company L.L.C. Form Number L35790 3/12
Printed in USA

Total Restaurant Supply